



PLUS

Biphasic Defibrillator



Biphasic Waveform
AED Mode

SpO₂ / ETCO₂ / NIBP
Pace Maker



Turkish First Aid Association
support Life-Point Defibrillators






PLUS

Biphasic Defibrillator

Life-Point PLUS Defibrillator Technical Specifications

Waveform	Biphasic
Operating Modes	Manual / AED / Synchronous
Energy Selection (Joule)	2-3-5-7-10-20-30-50-70-100-150-200-250-270
ECG Derivations	DI DII DIII AvR AvL AvF V1...V6
ECG Cable Options	3 / 5 / 10 Leads (3 / 7 / 12 ECG Derivations)
ECG Filters	Monitor I Monitor II Strong Surgery Diagnostic
Heart Rate Alarm Limits	0 - 300 bpm
Monitor Type	Color TFT LCD / 7 inch / 800x480 resolution
Monitor Speed	25 - 50 mm/sec (ETCO ₂ 6,25 - 12,5 mm/sec)
Printer Type / Speed	Thermal Printer / 25 - 50 mm/sec
Printer Paper Size	50mm x 30m
Max Discharging	200 (with full battery)
ECG Monitoring Time	4 hours (with full battery)
Battery Charging Time	3 hours
Memory	Yes (ECG Signal / Events / Trends / Alarms)
Working Conditions	0/40 °C and %30-95 Rh
Storing Conditions	-20 / + 55 °C
Dimensions	330x314x175 mm
Weight	5 Kg (included battery and paddles)
Main Supply Voltage	AC 220V 50-60 Hz
Pediatric Paddles	Yes
Paddles Contact Indicator	Yes
Pace Maker	Optional (fix / demand)
SpO ₂	Optional
NIBP	Optional
ETCO ₂	Optional
Internal Paddle	Optional
Trolley	Optional
Ambulance Bracket (EN1789)	Optional

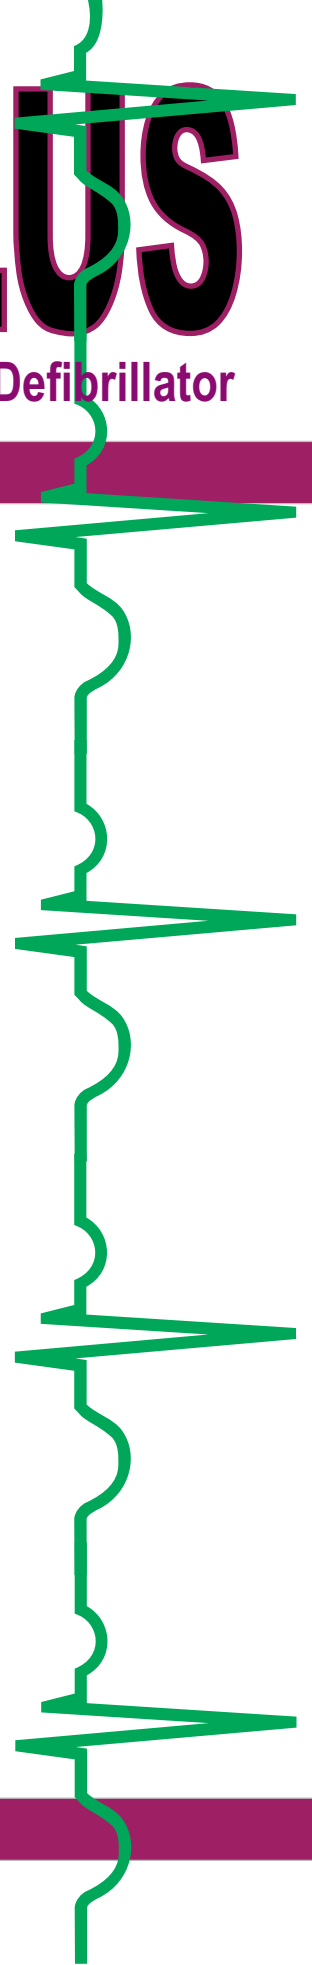

www.metsismedikal.com



Merkez | Head Office
Uzay Çağı Caddesi 1431.Sokak
Ostim ODTU Teknokent Binası
Ostim / ANKARA / TURKEY
Tel: +90 312 386 21 90
Fax: +90 312 386 21 80

Şube | Branch Office
Nish İstanbul / Sanayi Caddesi
No: 44 - C Blok Kat:1 Daire:11
Çobançeşme / Bahçelievler / İSTANBUL
Tel: +90 212 603 66 95
Fax: +90 212 603 66 94

info@metsismedikal.com